




north star design

CD PLAYER BLUE DIAMOND

CD formats supported	CD, CD-R, CD-RW
Digital to analogue converter	ES9016 SABRE
Frequency response	1 Hz – 22 kHz (CD) 1 Hz – 100 kHz (DAC)
Digital Input	S/PDIF COAX, TOSLINK (44.1-192 kHz 16/24 bit)
Digital Input USB	44.1-384 kHz 32 bit (PCM) 2.8-11.2 Mbit/s (DSD)
Digital Output	S/PDIF Coax 75 Ohm (44.1-192 kHz 16/24 bit)
Maximum Output	(0dbFS) 4 V balanced 2 V single ended
Output	1 pair XLR balanced audio output 1 pair RCA single ended audio output
Output impedance	75 Ohm single ended 150 Ohm balanced
Power supply	100 V, 120 V, 230 V, 240 V (50-60 Hz) factory set for destination country
Power consumption	25 W max.
Dimensions	17 in (W) x 15.5 in (D) x 3.35 in (H) 43.5 cm (W) x 35 cm (D) x 8.5 cm (H)
Shipping Weight	22lbs. (10 kg)

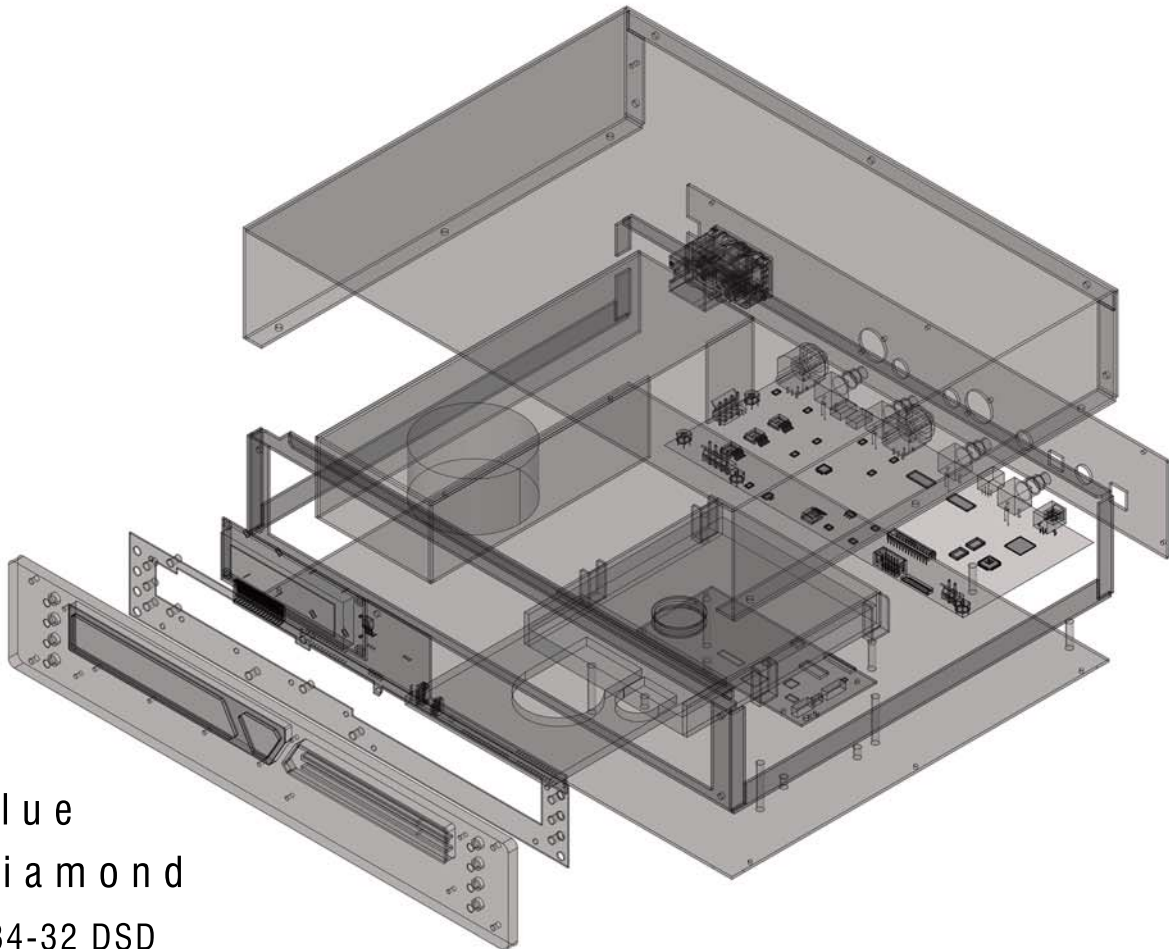

Blue
Diamond
384-32 DSD
cd-player

www.northstar.it - info@northstar.it